

Experiment of 348 Mbps downlink from 50-kg class satellite

Tomoya Fukami

The University of Tokyo
3-1-1, Yoshinodai, Chuo-ku, Sagamihara,
Kanagawa, JAPAN
e-mail: fukami.tomoya (at) ac.jaxa.jp

Hiromi Watanabe

The University of Tokyo

Hirobumi Saito

Japan Aerospace Exploration Agency

Atsushi Tomiki

Japan Aerospace Exploration Agency

Takahide Mizuno

Japan Aerospace Exploration Agency

Naohiko Iwakiri

National Institute of Information and
Communications Technology

Osamu Shigeta

AI Electronics Ltd.

Hitoshi Nunomura

AI Electronics Ltd.

Kaname Kojima

Addnics Corporation

Takahiro Shinke

Addnics Corporation

Abstract A high-speed downlink communication system is required to meet various applications for nano/small satellites. Therefore, it is essential to implement a transmitter with small weight and power in such satellites. We have developed high speed communication system capable of 300 Mbps downlink for small satellite. In the onboard transmitter, RF power amplifier consumes large power. In order to reduce DC power consumption of transmitter, we have developed GaN-HEMT power amplifier for X band downlink. Since this amplifier has not only high power efficiency but also high amplitude and phase linearity, we can use amplitude-phase modulation schemes such as 16QAM. The developed communication system complies with CCSDS 131.2-B-1 standard. This standard provides adaptive coding and modulation schemes. By combining various modulation schemes with variable coding rate of error correction code, the developed communication system provides user data rate from 72 to 540 Mbps depending on the pass condition. The Hodoyoshi-4 satellite equipped with this communication system was launched in 2014 successfully and we demonstrated 348 Mbps downlink from 50-kg class satellite with 16QAM modulation scheme. The measured bit error rate was less than 1.7×10^{-9} . By using 64APSK modulation, downlink speed of over 500 Mbps with 50-kg class satellite will be available in the future.

Keyword small satellite, X band, GaN, 16QAM, 64APSK

1. Introduction

Recent small satellites for earth observation are equipped with high-resolution sensors. However, it is true that small satellite missions still have limitations of satellite functions compared with large satellites. One of the main limitations is downlink capability. Since high-resolution sensors generate large quantities of data, high-speed downlink capabilities are needed.

Table 1 shows the specifications of two famous small satellites. Both satellites use 8-PSK modulation with 3 bits per symbol and X band for mission data downlink. Since the symbol position of 8-PSK modulation is constant amplitude, it is possible to drive the RF power amplifier with the high power efficiency. In other words, by using 8-PSK modulation, the power consumption of the onboard transmitter can be reduced. In order to achieve higher speed communication using X band, one approach is using higher order modulation schemes. Since higher order modulation schemes use not only phase modulation but also amplitude modulation, power efficiency of RF amplifier degrades in general.

The purpose of our research is to develop a high data rate (over 300 Mbps) communication system which can be applicable to small satellites of 50-kg class using amplitude-phase modulation schemes such as 16 QAM. We have been developing the communication subsystem for the flight hardware as well as the ground system, paying attention to reduce the DC power consumption and mass of onboard instruments. In order to achieve both high power efficiency and linearity for amplitude-phase modulation, a new RF power amplifier using GaN-HEMTs (High Electron Mobility Transistors) is developed. This system has been demonstrated on orbit using Japanese Hodoyoshi-4 Satellite launched in 2014. In December, 2014, the 3.8 m antenna station at ISAS, Sagami-hara received 348 Mbps data with 16QAM modulation and successfully demodulated/decoded them without error. This communication speed is as high as a half of one of Daichi 2 (ALOS-2), a Japanese earth observation satellite with about 2 tons mass and is the world fastest as a 50kg class small satellite. This result indicates that the capability of data transmission from a small satellite approaches to capability of a large satellite.

Table 1 Specifications of recent small satellites for earth observation [1].

	SkySat-1 [2]	Flock 1 [3]
Operator	Skybox Imaging	Planet Labs
Launch date	21 November 2013	9 January 2014
Mass	~100 kg	~5 kg
Spatial resolution	~1 m	3-5 m
Downlink system		
Number of channels	3	1
Frequency	8 GHz	8 GHz
Transmitter Power	1.0 W × 3 ch.	3.2 W
Modulation	8-PSK	QPSK, 8-PSK
Maximum data rate	101 Mbps × 3 ch.	120 Mbps

2. High Speed Communication System

Table 2-5 and Fig. 1 summarize our novel communication system with high data rate for small satellites.

Table 2 Onboard transmitter spec.

Frequency band	8160 ± 60 MHz
RF output power	2 W
Symbol rate	100 Msps
Modulation schemes	QPSK, 16QAM, 8PSK, 16APSK, 32APSK, 64APSK, 64QAM
Data rate (user)	72 to 540 Mbps
Error correction code	SCCC based on CCSDS 131.2-B-1 [4]
Data input interface	LVDS
DC power	28 V, 22 W
Volume	12 × 10 × 7.3 cm
Weight	1330 g
Operating temperature	-20 to +50 °C
Radiation test	20 kRad

Table 3 Onboard antenna spec.

Type	2 × 2 patch array
Peak gain	13.5 dBi
Beam width	Approx. 20°
Size	7 × 7 cm ²
Weight	69 g

Table 4 Ground antenna spec.

Type	3.8 m Cassegrain with ring focus
Frequency	S/X dual band
Peak gain	36 dBi (S), 47.5 dBi (X)

Table 5 Ground receiver spec.

Type	Software receiver with IF sampling
A/D converter	400 MS/s, 14 bit
Modulation schemes	QPSK, 16QAM [Under development] 8PSK, 16APSK, 32APSK, 64APSK, 64QAM

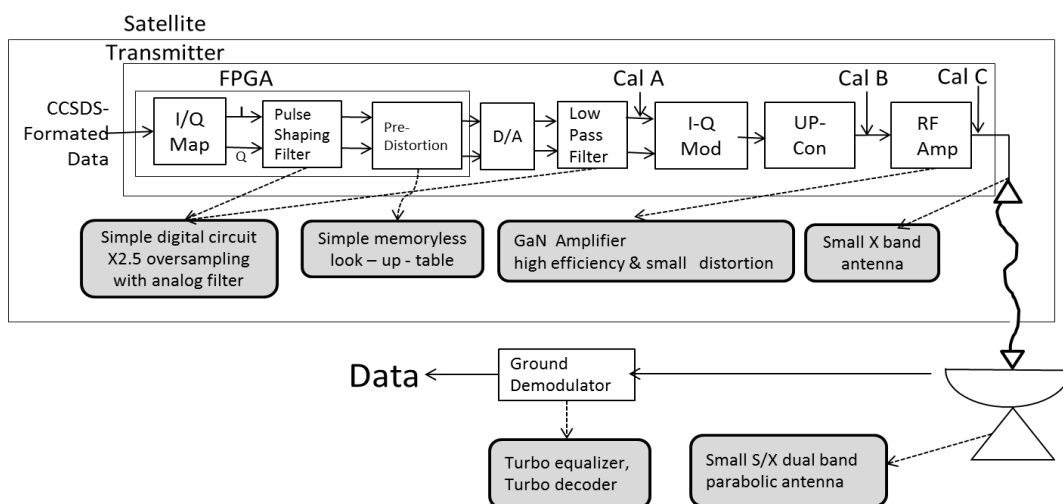


Fig. 1 System diagram of communication system.

2.1 Onboard Instruments

We have developed the X band high-speed transmitter of over 300 Mbps downlink capacity for small satellite (Fig. 2). This transmitter consists of the baseband unit and the RF unit. The baseband unit inputs the data compliant with the Consultative Committee for Space Data Systems (CCSDS) 131.2-B-1 from onboard data recorder and outputs I/Q signals to the RF unit. The CCSDS 131.2-B-1 defines the serial concatenated convolutional code (SCCC) and the variety of modulation schemes (QPSK, 8PSK, 16APSK, 32APSK and 64APSK). In addition to these modulation schemes, we implemented the 16QAM and 64QAM. In order to reduce the power consumption, we reduced the clock frequency of the FPGAs to 125 MHz with assists 2.5X oversampling technique and parallel processing, even though the symbol rate is 100 Msps. This symbol rate is higher than SkySat-1 (45 Msps) [2] or Flock 1 (4-45 Msps) [3]. In the RF unit, RF power amplifier consumes large power. We applied the GaN-HEMT class AB amplifier (Fig. 3) with high power efficiency of 47% to this transmitter. Fig. 4 shows AM-AM and AM-PM characteristics of the amplifier. The nonlinear phase change of this amplifier is less than 2 degrees at output backoff of 1 dB. Therefore it is possible to achieve amplitude-phase modulation such as 16QAM with low backoff driving. By integrating these technologies, the transmitter consumes only 22 W. The baseband FPGA supports digital predistortion based on simple look up tables. This look up table can be reconfigured on orbit by command. Since the non-linearity of power amplifier is small, we do not use this function at present.

We also developed small onboard X band middle gain antenna (Fig. 5). This antenna is mounted on satellite body and directed to ground station by attitude control system. In addition to this antenna, the iso flux antenna (Fig. 6) was developed for earth pointing mode.



Fig. 2 Flight model of X band transmitter. DC power consumption is 22 W and mass is 1330 g.

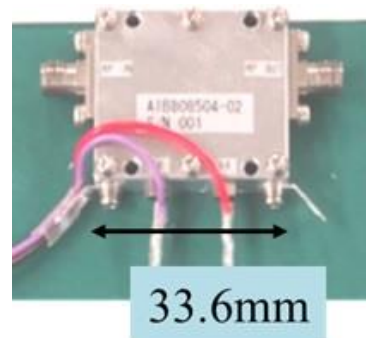


Fig. 3 Engineering model of GaN-HEMT power amplifier.

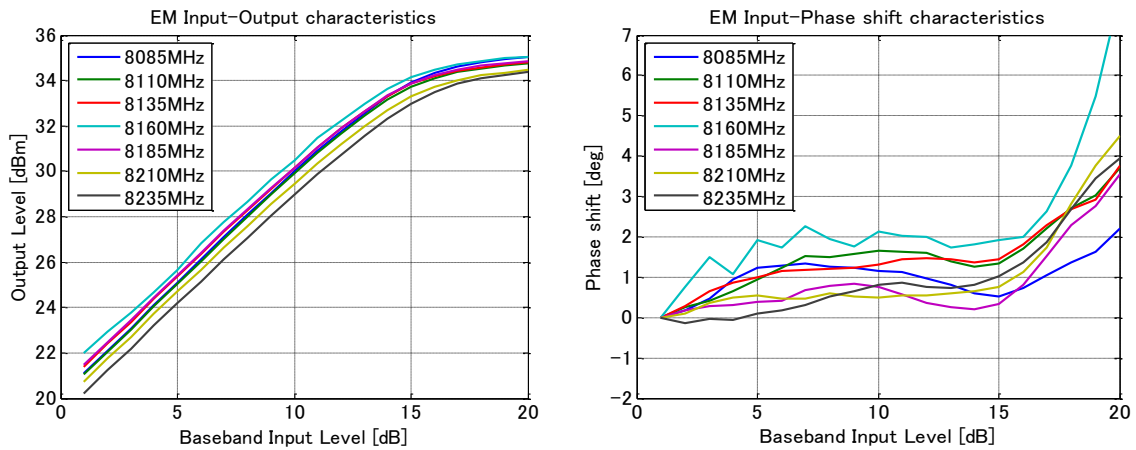


Fig. 4 Input-output characteristics of RF power amplifier. Left: AM-AM characteristics, Right: AM-PM characteristics.

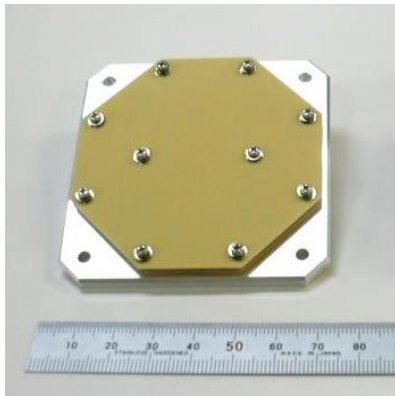


Fig. 5 Onboard middle gain antenna. Peak gain is 13.5 dBi and mass is 69 g.



Fig. 6 Onboard iso flux antenna. Peak gain is 5 dBi and mass is 149 g.

2.2 Ground Station

Operation and data reception of small satellites require a compact, low-cost ground station. We have developed S/X dual band 3.8 m antenna at Sagamihara campus of ISAS/JAXA (Fig. 7). There are some commercial ground receivers which support high data rate and SCCC error correction [5] [6]. However, since these receivers were developed for large satellites, they are expensive. Therefore, it is difficult to use existing commercial receiver in low-cost small satellite missions. For our research purpose, real time demodulation is not necessarily required for mission data downlink. We have developed software demodulator and SCCC decoder in Matlab. Fig. 8 shows the system diagram of ground receiver. Since current version of software receiver supports QPSK and 16QAM modulation schemes only, the current maximum user data rate of our communication system is 348 Mbps (16QAM, coding rate = 0.87).



Fig. 7 S/X dual bands 3.8 m antenna. Peak gain of X band is 47.5 dBi.

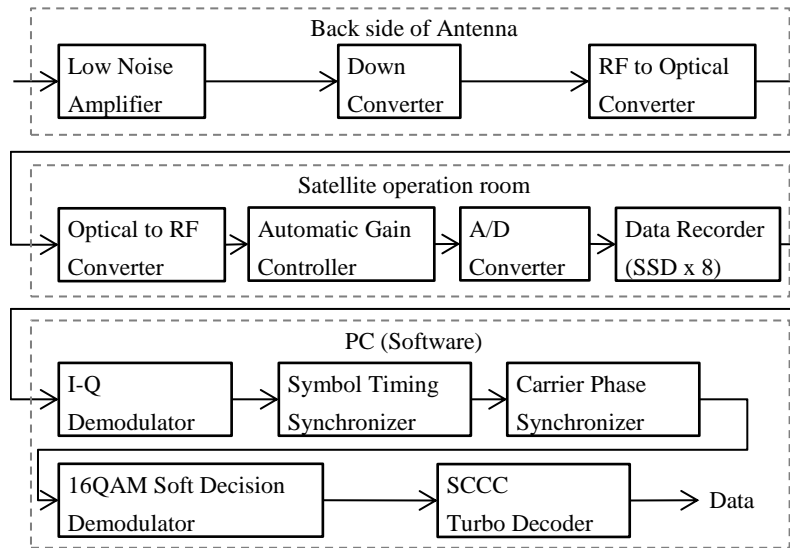


Fig. 8 System diagram of ground receiver.

2.3 Link simulations

Our communication system complies with CCSDS 131.2-B-1 standard. Current our ground receiver only supports QPSK and 16QAM modulation. Fig. 9 shows the simulation results of bit error rate. Nonlinearity and frequency dependence of the transmitter and receiver RF electronics causes increase in Bit Error Rate (BER). When bit error rate of 1×10^{-6} with margin of one decibel is required, our communication system can transmit up to 32.5 GBytes per pass from sun-synchronous orbit with a 3.8 m ground antenna.

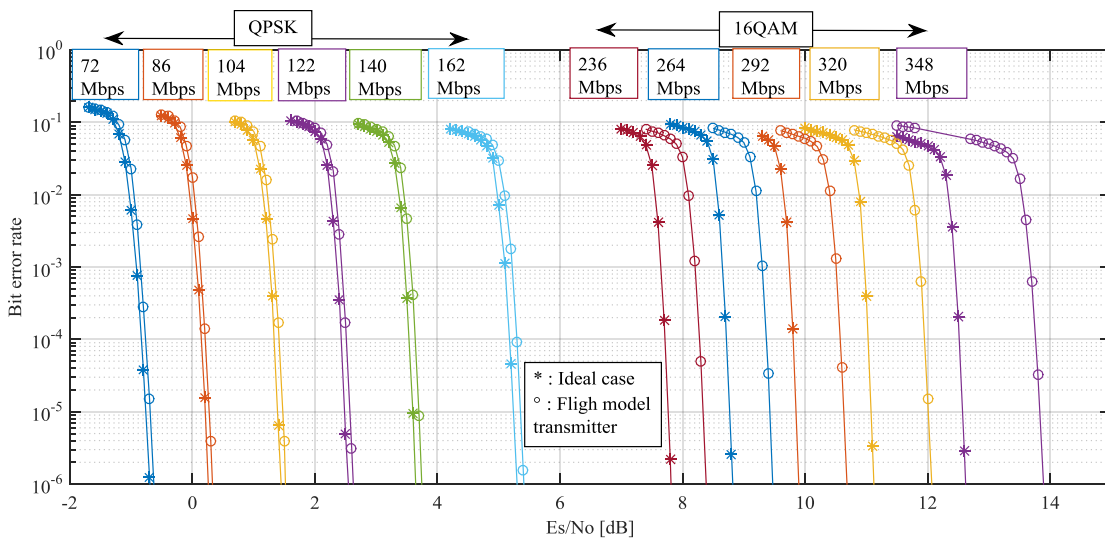


Fig. 9 Simulation results of bit error rate.

3. Experiments with Hodoyoshi-4 Satellite

The Hodoyoshi-4 is Japanese small satellite with 64 kg mass. Our high speed transmitter and small antenna are installed to this satellite. Hodoyoshi-4 was launched on June 20th, 2014, 4:11 (JST) from Yasny, Russia by Dnepr rocket. Sagamihara 3.8 m antenna station controls the satellite via S band link as a main station. We have performed high speed downlink experiments with 16QAM, 100Mps for 348 Mbps data downlink. It is supposed that the satellite is attitude-controlled toward the ground station continuously at coarse accuracy of 5° during high speed communications. However, the satellite was not ready yet for this attitude operation. Instead we performed high speed data downlink experiments when the satellite passed at higher elevation than 70° with earth-pointing attitude mode. In this condition, the earth station is inside a half beam width of the onboard antenna. The transmitter sent repeatedly a fixed known data (PN code). The received signals were demodulated and decoded by software receiver. Fig. 10 and Fig. 11 show I-Q constellation diagram of received signals. Estimated received C/No based on received IF spectrum is about 96 dBHz at ground antenna elevation angle of 84.5° and slant range of 622 km. The measured bit error rate is 1.2×10^{-3} without error correction. After turbo decoding process, the measured bit error rate is less than 1.7×10^{-9} .

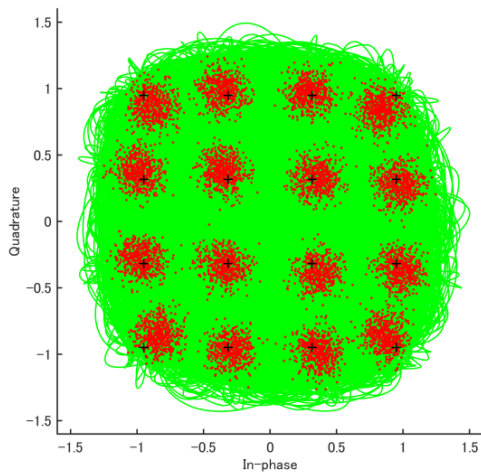


Fig. 10 I-Q constellation diagram of received 16QAM signals. Raw bit error rate is 1.2×10^{-3} .

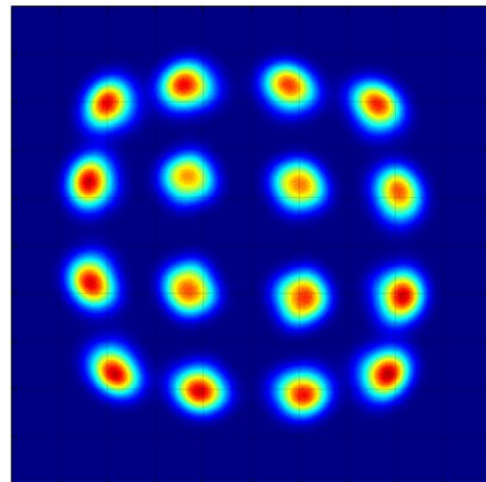


Fig. 11 Density plot diagram of received 16QAM signals.

4. Conclusion

We have developed high speed downlink system for small satellite. The Hodoyoshi-4 satellite equipped with our communication system was launched successfully and we demonstrated 348 Mbps downlink from 50-kg class satellite with 16QAM modulation

scheme and SCCC error correction code. There is no problem in communication system after launch. In the future, we will try 400 Mbps to 500 Mbps downlink with 32APSK or 64APSK using Hodoyoshi-4.

Acknowledgements

This research is granted by the Japan Society for the Promotion of Science (JSPS) through the “Funding Program for World-Leading Innovative R&D on Science and Technology (FIRST Program),” initiated by the Council for Science and Technology Policy (CSTP).

References

- [1] D. Butler, "Many eyes on Earth," *NATURE*, vol. 505, pp. 143-144, 2014.
- [2] Skybox Imaging, Inc., "LINK BUDGETS," in *Exhibit 43, SAT-LOA-20120322-00058*, FCC, 2012, pp. 15-24.
- [3] Planet Labs Inc., "LINK BUDGETS," in *Exhibit 43, SAT-LOA-20130626-00087*, FCC, 2013, pp. 14-20.
- [4] CCSDS, "Flexible Advanced Coding and Modulation Scheme for High Rate Telemetry Applications," 131.2-B-1, 2012.
- [5] Zodiac Data Systems, "Cortex HDR XXL - High Data rate Receiver," [Online]. Available: <http://www.zds-fr.com/upload/docs/032557-ftp99-ed7r0-cortex-hdr-w.pdf>.
- [6] ViaSat, "ViaSat High Rate Receiver 3200 For Remote Sensing and Earth Observation," [Online]. Available: https://www.viasat.com/files/assets/High_rate_modem_3200_Datasheet_005_web.pdf.